

The TS-800 is a Central unit of the Infrared Conference system. Since the system is cordless, it can be easily installed and removed based on a free layout. Connecting the TS-800 to the Transmitter/Receiver units permits control of the conference units. It features control function from a PC (The control software is not attached.), and installation confirmation function that confirms the connection status for the Transmitter/Receiver units and installation status for the conference units. With the use of an optional rack mounting bracket, it can be mounted in an EIA Standard equipment rack (4 unit size).



Order no: TS-800 CE

Specifications

Power source	100 - 240 V AC, 50 / 60 Hz (use of the supplied AC adapter)
Input / Output	Input: 1 x Mic: -60 dBV, 600 Ω, unbalanced, phone jack 1 x AUX: -20 dBV, 10 kΩ, unbalanced, phone jack Output: 2 x Recording: -20 dBV, 10 kΩ, unbalanced, phone jack/RCA pin jack 1 x Headphone: mini jack
Weight	2,7 kg
Dimensions (W x H x D)	359 x 118,8 x 179,8 mm
Dimensions (ø x D)	x 179,8 mm
Gross weight	4,25 kg

Appearance

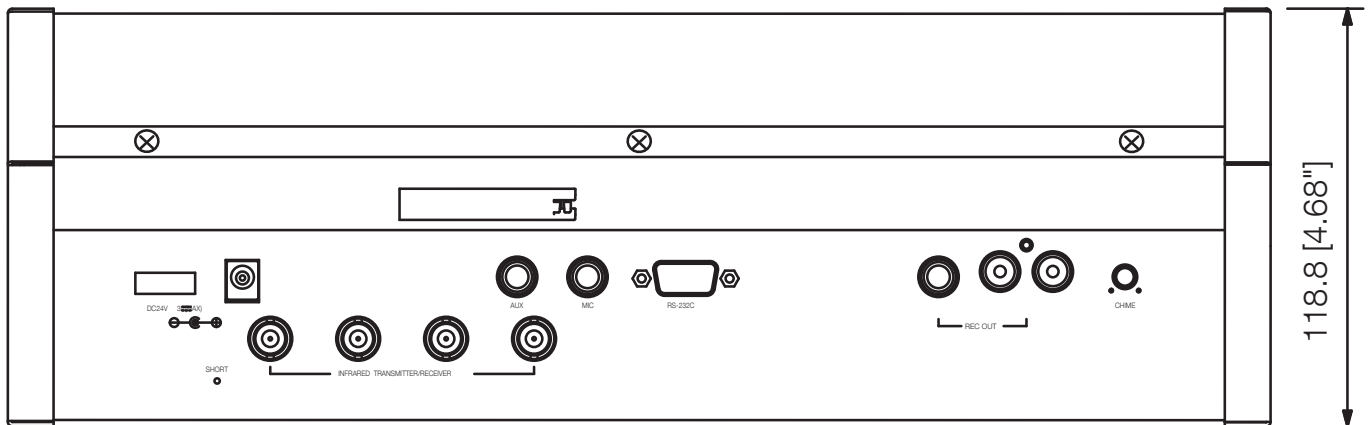


Figure as viewed from point A

